



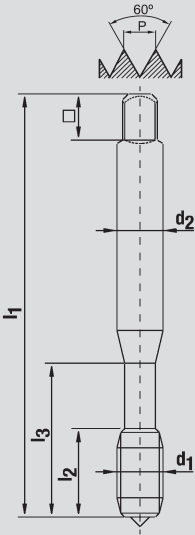

<b>Kivitel</b>	▶	45°-os csavarhornyú, C forma, 2-3 menetbekezdés
<b>Magfurat típus</b>	▶	
<b>Bevonat</b>	▶	
<b>Katalógusszám</b>	▶	<b>4044</b>
<b>Tűrés</b>	▶	ISO 2-6H
		Grulo-Alu 
<b>Felhasználási terület</b>		Aluminium, réz, rézötvözetek lásd a 14, 15 oldalakat
<b>Hűtőkenőanyag</b>	▶	kenőolaj vagy emulzió
<b>Vágósebesség v<sub>c</sub></b>	▶	10 - 30 m/min

d <sub>1</sub>	P (mm)	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	d <sub>2</sub>	□	
M 2	0,4	45	6	10	2,8	2,1	1,60
M 2,5	0,45	50	6	12	2,8	2,1	2,05
M 3	0,5	56	7	18	3,5	2,7	2,50
M 3,5	0,6	56	7	20	4	3	2,90
M 4	0,7	63	8	21	4,5	3,4	3,30
M 5	0,8	70	10	25	6	4,9	4,20
M 6	1	80	12	30	6	4,9	5,00
M 7	1	80	12	30	7	5,5	6,00
M 8	1,25	90	15	35	8	6,2	6,80
M 10	1,5	100	18	39	10	8	8,50