



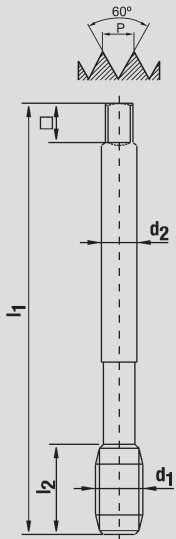

Kivitel	45°-os csavarthornú, C forma, 2-3 menetbekezdés	
Magfurat típus		
Bevonat		
Katalógusszám	6044	
Tűrés	ISO 2-6H	
	Grulo-Alu 	
Felhasználási terület lásd a 14, 15 oldalakat	Alumínium, réz, rézötvezetek	
Hűtőkenőanyag	kenőolaj vagy emulzió	
Vágósebesség v_c	10 - 30 m/min	

d ₁	P (mm)	l ₁	l ₂	d ₂	□	
M 6	1	80	12	4,5	3,4	5,00
M 8	1,25	90	15	6	4,9	6,80
M 10	1,5	100	18	7	5,5	8,50
M 12	1,75	110	18	9	7	10,20
M 14	2	110	20	11	9	12,00
M 16	2	110	20	12	9	14,00
M 20	2,5	140	25	16	12	17,50