
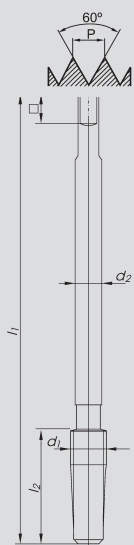



Kivitel	Hosszú bekezdés = a menethossz 2/3-a	
Magfurat típus		
Bevonat		
Katalógusszám	8000	
Tűrés	ISO 2-6H	



Felhasználási terület	Ötvözetlen és ötvözött acélok; szakítószilárdság $\leq 900 \text{ N/mm}^2$	
------------------------------	---	--

d ₁	P (mm)	l ₁	l ₂	d ₂	□	
M 3	0,5	70	22	2,2		2,50
M 3,5	0,6	80	25	2,5	2,1	2,90
M 4	0,7	90	25	2,8	2,1	3,30
M 5	0,8	100	28	3,5	2,7	4,20
M 6	1	110	32	4,5	3,4	5,00
M 8	1,25	125	40	6	4,9	6,80
M 10	1,5	140	45	7	5,5	8,50
M 12	1,75	180	50	9	7	10,20
M 14	2	200	56	11	9	12,00
M 16	2	200	63	12	9	14,00
M 20	2,5	250	70	16	12	17,50