

# MINICUT

Bohrungsbearbeitung

grooving, boring and profiling


## Typ 607 / 608 / 609 / 611

Klemmhalter Stahl

D min. 7.0 mm


toolholder steel

D min. 7.0 mm

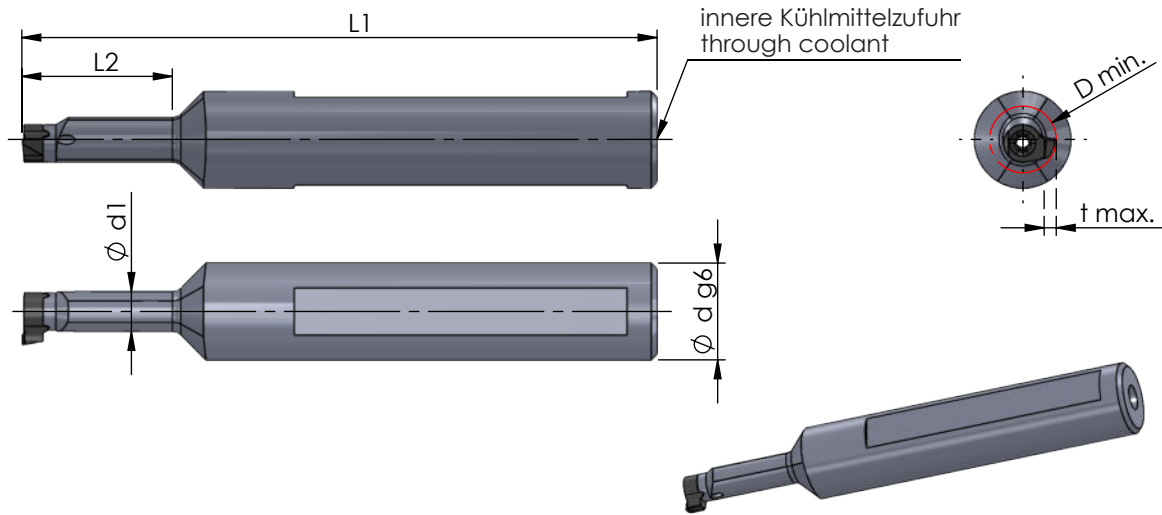

Abmessungen in mm

dimensions in mm



Bestellnummer part number	Ø d g6	Ø d (inch)	Ø d1	L1	L2	Typ: t max. / D min.	Spannschraube screw	Schraubenschlüssel wrench	Anzugs- drehmoment torque	für Schneidplatte use with insert
607.0016.1ST	16		4.8x6	80	12	R/L S007: 1.0 / Ø7	M2-MC	T7F	1.2 Nm	R/L S07 R/L S007
607.0016.1E.ST	16		4.8x6	85	21	R/L S007: 2.0 / Ø7.8				
608.0158.1E.ST	15.875	5/8"	6x7	90	22	R/L S008: 1.0 / Ø8	M2.6-MC	T8F	1.2 Nm	R/L S08 R/L S008
608.0016.1ST	16		6	80	12	R/L S008: 1.0 / Ø8				
608.0016.1E.ST	16		6x7	90	22	R/L S008: 1.0 / Ø8				
609.0158.1E.ST	15.875	5/8"	6.6x7.4	105	25	R/L S009: 1.8 / Ø9	M2.6-MC	T8F	1.2 Nm	R/L S09 R/L S009
609.0016.1ST	16		6.6x7.4	95	14	R/L S009: 1.8 / Ø9				
609.0016.1E.ST	16		6.6x7.4	105	25	R/L S09: 2.8 / Ø10				
611.0158.2E.ST	15.875	5/8"	8x9.5	110	29	R/L S011: 2.3 / Ø11	M3.5-MC	T10F	3.0 Nm	R/L S11 R/L S011
611.0016.2ST	16		8	97	16					
611.0016.2E.ST	16		8x9.5	110	29					

Bestellbeispiel:  
607.0016.1ST

order-example:  
607.0016.1ST