
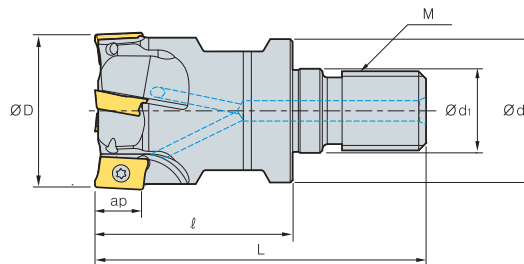


AMM1500



• AR: 7.5°~12.5°
• RR: -28°~-6°

(mm)

Designation		ØD	Ød	Ød1	l	L	M	ap	
AMM 15010HR-M06	1	10	9.5	6.5	25	40	M06	9	0.01
15012HR-M06	1	12	11	6.5	25	40	M06	9	0.02
15016HR-M08	2	16	14.5	8.5	25	42	M08	9	0.03
15020HR-M10	2	20	18	10.5	30	51	M10	9	0.06
15025HR-M12	3	25	23	12.5	35	59	M12	9	0.12
15032HR-M16	4	32	29	17	40	67	M16	9	0.22

Available inserts

APMT-MA APMT-ML APMT-MM



Designation	Cermet		Coated											Uncoated		page		
	CN2000	CN30	NCM825	NC5330	NCM535	NCM545	PC2505	PC2510	PC3600	PC3700	PC8510	PC9530	PC9540	PC5300	PC5400		G10	H01
APMT 0903PDFR-MA																		●
090308PDFR-MA																		
0903PDER-ML																		
090308PDER-ML																		
0903PDSR-MM				●			●	●	●	●	●							
090308PDSR-MM				●														
090312R-MM																		
090316R-MM				●														
090320R-MM																		

E05

Available adaptor

Designation	Available adaptor
AMM 15010HR-M06	MAT-M06
15012HR-M06	
15016HR-M08	MAT-M08
15020HR-M10	MAT-M10
15025HR-M12	MAT-M12
15032HR-M16	MAT-M16

Designation: AMM1032HR-M16
Modular head threading measure size (M16)

||

Adaptor spec.: MAT-M16-035-S32S
Adaptor threading measure (M16)

Parts

Specification		
Ø10~Ø14	FTKA02555S	TW08S
Ø16~Ø100	FTKA02565S	TW08S

Available inserts E05 Available adaptor E371~E372