

# FMRS2000/2500

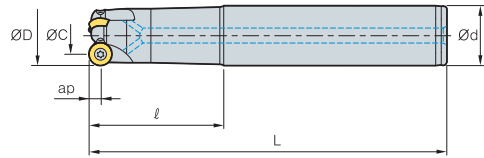


Fig. 1

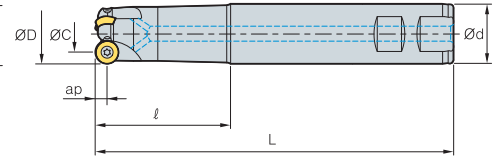


Fig. 2



• AR: 5°  
• RR: -5° ~ -1°

(mm)

Designation		ØD	ØC	Ød	l	L	ap		Fig.	
FMRS	2015HRD-S	2	15	8	16	55	115	3.5	0.3	2
	2015HRD-M	2	15	8	20	80	150	3.5	0.4	1
	2015HRD-L	2	15	8	20	90	200	3.5	0.5	1
	2020HRD-S	3	20	14	20	65	125	3.5	0.3	2
	2020HRD-M	3	20	14	20	80	150	3.5	0.4	1
	2020HRD-L	3	20	14	25	90	200	3.5	0.5	1
FMRS	2516HRD-S	2	16	8	16	65	125	4.0	0.3	2
	2516HRD-M	2	16	8	16	80	150	4.0	0.4	1
	2516HRD-L	2	16	8	20	90	200	4.0	0.5	1
	2520HRD-S	2	20	12	20	65	125	4.0	0.4	2
	2520HRD-M	2	20	12	20	80	150	4.0	0.5	1
	2520HRD-L	2	20	12	25	90	200	4.0	0.6	1
	2525HRD-S	3	25	17	25	55	125	4.0	0.5	2
	2525HRD-M	3	25	17	25	90	200	4.0	0.6	1
2525HRD-L	3	25	17	32	110	250	4.0	0.7	1	

## Available inserts

RDHW-E,F,S      RDKW



Type	Designation	Cermet		Coated										Uncoated		page				
		CN2000	CN30	NCM325	NC5330	NCM535	NCM545	PC2505	PC2010	PC3600	PC3700	PC6510	PC9530	PC9540	PC5300		PC5400	ST30A	H01	
2000 type	RDHW	0702M0E																		E15 E16
		0702M0F																		
		0702M0S																		
2500 type	RDKW	0702M0E																		
	RDHW	0803M0E																		
		0803M0F																		
		0803M0S																		
	RDKW	0803M0E																		

## Parts

Specification		
Ø15-Ø20 (2000 type)	FTNA02555	TW07S
Ø16-Ø25 (2500 type)	FTNA0305 FTNA0306 (Ø20 over)	TW09S

Available inserts E15, E16