



# HFMDM-LN06 new

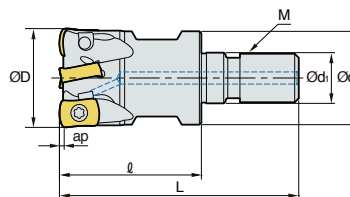

• AR: -9°  
• RR: 10°~15°

(mm)

Designation		ØD	Ød	Ød1	ℓ	L	M	ap	
<b>HFMDM</b> 016R-2-M08-LN06	2	16	14.5	8.5	25	42	M08	0.7	0.03
017R-2-M08-LN06	2	17	14.5	8.5	25	42	M08	1.0	0.03
018R-2-M08-LN06	2	18	14.5	8.5	25	42	M08	1.0	0.04
019R-2-M08-LN06	2	19	14.5	8.5	25	42	M08	1.0	0.05
020R-3-M10-LN06	3	20	18	10.5	30	51	M10	1.0	0.06
021R-3-M10-LN06	3	21	18	10.5	30	51	M10	1.0	0.07
025R-4-M12-LN06	4	25	23	12.5	35	59	M12	1.0	0.10
026R-4-M12-LN06	4	26	23	12.5	35	59	M12	1.0	0.10
032R-5-M16-LN06	5	32	29	17	40	67	M16	1.0	0.20
033R-5-M16-LN06	5	33	29	17	40	67	M16	1.0	0.20
035R-5-M16-LN06	5	35	29	17	40	67	M16	1.0	0.21
040R-6-M16-LN06	6	40	29	17	40	67	M16	1.0	0.24
042R-6-M16-LN06	6	42	29	17	40	67	M16	1.0	0.25

## Available inserts

LNX-ML LNX-MF LNX-MM



Designation	Coated				page
	PC2510	PC3700	PC5300	PC5400	
LNX 060310R-ML			●	●	E11
060310R-MF	●	●	●	●	
060310R-MM	●	●	●	●	

## Parts

Specification		
Ø16~Ø42	FTNA0306	TW09S

Available inserts E11 Available adaptor E371~E372