


STFPR/L



TP□□

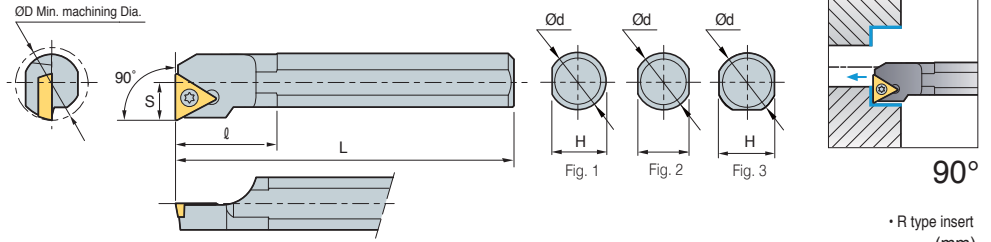

Steel shank type

• R type insert (mm)

Designation	ØD	Ød	H	L	S	ℓ	Insert	Screw	Wrench	Fig.
S10M-STFPR/L-11	13	10	9	150	7	16	TP□□1103□□	FTGA03507	TW15P	2
S12M-STFPR/L-11	16	12	11	150	9	20		FTGA03508	TW15P	2
S16N-STFPR/L-11	20	16	14	160	11	25				
S16R-STFPR/L-11	20	16	14	200	11	25	TP□□1604□□	FTGA0411F	TW15P	2
S20N-STFPR/L-16	25	20	18	160	13	32				
S20S-STFPR/L-16	25	20	18	250	13	32				
A10H-STFPR/L-11	13	10	9.5	100	7	16	TP□□1103□□	FTGA03507	TW15P	1
A12K-STFPR/L-11	16	12	11	125	9	20		FTGA03508	TW15P	1
A16M-STFPR/L-11	20	16	15	150	11	25				
A20Q-STFPR/L-16	25	20	19	180	13	32	TP□□1604□□	FTGA0411F	TW15P	1

Carbide shank type

(mm)

Designation	ØD	Ød	H	L	S	Insert	Screw	Wrench	Fig.		
C08K-STFPR/L-08	10	8	7	125	5	TP□T0802□□	FTNA02205	TW06P	2		
C10K-STFPR/L-11	12	10	9	125	6		TP□T1103□□	FTNA0305		TW09P	
C10M-STFPR/L-11	12	10	9	150	6						
C12M-STFPR/L-11	15	12	11	150	8	FTNA0307		TW09P			
C12Q-STFPR/L-11	15	12	11	180	8						
C16R-STFPR/L-11	20	16	15	200	10	TP□T1604□□		FTNA0408		TW15P	
C16S-STFPR/L-11	20	16	15	250	10						
C20R-STFPR/L-11	25	20	18	200	13						
C20S-STFPR/L-11	25	20	18	250	13	TP□T0802□□		FTNA02205		TW06P	
C20R-STFPR/L-16	25	20	18	200	13		TP□T1103□□				FTNA0305
C20S-STFPR/L-16	25	20	18	250	13						
C25T-STFPR/L-16	32	25	23	300	17				FTNA0307		TW09P
E08K-STFPR/L-08	10	8	7	125	5						
E10K-STFPR/L-11	12	10	9	125	6				FTNA0305		TW09P
E10M-STFPR/L-11	12	10	9	150	6						
E12M-STFPR/L-11	15	12	11	150	8				FTNA0307		TW09P
E12Q-STFPR/L-11	15	12	11	180	8						
E16R-STFPR/L-11	20	16	15	200	10		TP□T1604□□		FTNA0408		TW15P
E16S-STFPR/L-11	20	16	15	250	10						
E20R-STFPR/L-11	25	20	18	200	13						
E20S-STFPR/L-11	25	20	18	250	13	TP□T1103□□	FTNA02205	TW06P			
E20R-STFPR/L-16	25	20	18	200	13						
E20S-STFPR/L-16	25	20	18	250	13						
E25T-STFPR/L-16	32	25	23	300	17						

• Applicable inserts B81~B83

• Use left handed insert for right handed holder

