


AMC(M)2000M



(mm)

Designation	ØD	ØD2	Ød	Ød1	Ød2	a	b	E	F	No. of flute	ap	kg	
AMCM 2050M	16	50	40	22	11	18	10.4	6.3	21	58	4	39	0.7
AMC (AMCM) 2063M	16	63	50	25.4 (27)	13.5	20	9.5 (12.4)	6 (7)	25 (25)	58	4	39	0.8
2080M	20	80	60	31.75 (32)	-	45	12.7 (14.4)	8 (8)	35 (28)	63	5	39	0.96
2100M	24	100	80	38.1 (40)	-	56	15.9 (16.4)	10 (9)	38 (30)	63	6	39	1.2

() Metric size

Available inserts



Designation	Cermet		Coated											Uncoated		page		
	CN2000	CN30	NCM325	NC5330	NCM535	NCM545	PC2505	PC2510	PC3600	PC3700	PC6510	PC9530	PC9540	PC5300	PC5400		G10	H01
APMT 11T3PDFR-MA																		
11T308PDFR-MA																		
11T3PDER-ML														•	•			
11T308PDER-ML														•	•			
11T3PDSR-MM			•	•	•		•	•	•	•	•	•		•	•			
11T3PDSR-MF				•				•	•	•	•			•	•			
11T308PDSR-MM				•				•	•	•	•		•	•	•			
11T312PDSR-MM				•				•	•	•	•		•	•	•			
11T316R-MM				•				•	•	•	•		•	•	•			
11T318R-MM				•				•	•	•	•		•	•	•			
11T324R-MM				•				•	•	•	•		•	•	•			
11T3PDSR-MN2													•	•				
11T3PDSR-MN3													•	•				


E05

※ Please purchase 2 types of APMT-MN (nick type) inserts with different chip breakers. ※ Please use the cutters with even teeth.

Available arbors

Designation	Ød	NC arbors	
AMC (AMCM) 2050M	22.225	BT□□-FMA22.225-□□	BT□□-SMA22.225-□□
	22	BT□□-FMC22-□□	BT□□-SMC22-□□
2063M	25.4	BT□□-FMA25.4-□□	BT□□-SMA25.4-□□
	27	BT□□-FMC27-□□	BT□□-SMC27-□□
2080M	31.75	BT□□-FMA31.75-□□	BT□□-SMA31.75-□□
	32	BT□□-FMC32-□□	BT□□-SMC32-□□
2100M	38.1	BT□□-FMA38.1-□□	BT□□-SMA38.1-□□
	40	BT□□-FMC40-□□	BT□□-SMC40-□□

Caution when clamping the inserts

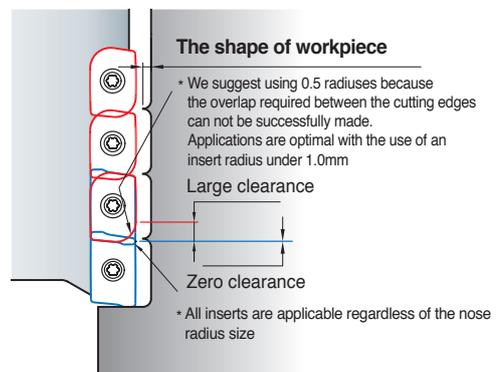

Parts

Specification	Screw	Wrench
Ø50~Ø100	FTKA02565S	TW08S

Available inserts E05 Available arbors and bolt E400~E402

