

FMRS4000 new

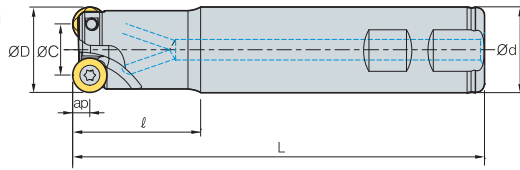


Fig. 1

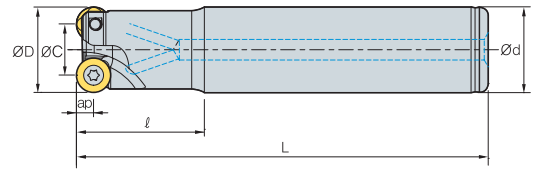


Fig. 2



- AR: -4°
- RR: -2°~0°

(mm)

Designation		ØD	ØC	Ød	ℓ	L	ap		Fig.	Insert size
FMRS										
4025HRP-2S25	2	25	13	25	60	160	6	0.46	1	12
4026HRP-2L25	2	26	14	25	60	200	6	0.48	2	12
4032HRP-2L25	2	32	20	25	40	190	6	0.68	2	12
4032HRP-2S32	2	32	20	32	50	125	6	0.64	1	12
4032HRP-2L32	2	32	20	32	50	250	6	1.40	2	12
4032HRP-3S32	3	32	20	32	50	125	6	0.64	1	12
4032HRP-3M32	3	32	20	32	60	160	6	0.85	2	12
4033HRP-3M32	3	33	21	32	60	200	6	1.01	2	12
4033HRP-3L32	3	33	21	32	60	300	6	1.67	2	12
4040HRP-3S32	3	40	28	32	35	105	6	0.60	1	12
4040HRP-3M32	3	40	28	32	50	160	6	0.96	2	12
4040HRP-4S32	4	40	28	32	35	105	6	0.60	1	12
4040HRP-4M32	4	40	28	32	35	150	6	0.87	2	12
4040HRP-4L32	4	40	28	32	35	250	6	1.46	2	12
4050HRP-4M32	4	50	38	32	50	150	6	1.10	2	12
4050HRP-4M40	4	50	38	40	50	150	6	1.44	2	12
4050HRP-4M42	4	50	38	42	50	150	6	1.55	2	12

Available inserts

RPCT-MA RPET-ML RPMT-MF RPMT-MM RPMW



Designation	Cermet		Coated											Uncoated		page		
	CN2000	CN30	NCM825	NC5330	NCM535	NCM545	PC2505	PC2510	PC3600	PC3700	PC6510	PC9530	PC9540	PC5300	PC5400		ST30A	H01
RPCT 1204M0-MA																		
RPET 1204M0E-ML														●	●			
RPMT 1204M0E-MF									●					●	●	●		
1204M0S-MM							●	●	●	●			●	●	●			
RPMW 1204M0S1							●	●	●	●				●	●			
1204M0S2														●	●			

Parts

Specification		
Ø25-Ø26	FTKA0408	TW15S
Ø32-Ø50	FTKA0410	TW15S

Available inserts E16

